

# COMPAC<sup>®</sup>

MANUFACTURER SINCE 1946



---

## CATALOGUE NO 11



# TABLE OF CONTENTS



**How Compac creates value**

**4-7**



**Low height jack 2 ton**



**Extremely low chassis jack 2 ton**



**Jack for vans, 4WDs and minibuses 3 ton**



**10**



**High capacity jacks 4 - 20 ton**



**11**



**High lift jacks 1,5 - 2 ton**



**12**



**High lift jacks 3 - 10 ton**



**13**



**Air hydraulic jacks**



**14-15**



**Hydraulic body repair kits**



**16**



**Wheel lifter for cars, vans and 4WD**



**17**



**Wheel dolly for trucks and buses**



**18**



**Wheel lifter for trucks and buses**



**19**



**Wheel lifter for agricultural and earth moving machinery**



**20-21**



**Workshop cranes**



**22-23**



**Universal transmission jacks**

**Accessories for transmission jacks**



**24-25**



**Telescopic transmission jack for cars, vans and 4WD**



**26**



**Telescopic transmission jack for trucks and buses**



**27**



**Spring compressor**



**28-29**



**Foot operated workshop presses 16 - 25 ton**



**30**



**Hand operated workshop presses 20 - 25 ton**



**31**



**Foot operated workshop presses 40 - 50 ton**



**32**



**Hand operated workshop presses 40 - 100 ton**



**33**



**Electro-hydraulic workshop presses 40 - 100 ton**



**34-35**




**Axle stands 2 - 12 ton**

**Bottle jacks 3 - 50 ton**



**36**

# HOW COMPAC CREATES VALUE **Lifting is serious business – We know!**

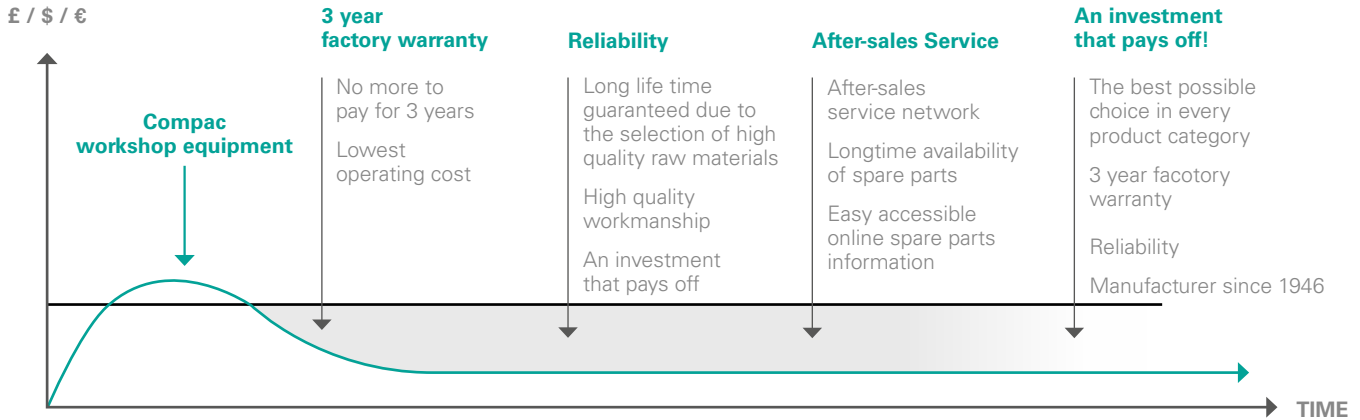

## FACTORY WARRANTY

Compac has set a benchmark in the industry by being the first manufacturer to offer a full 3 year warranty.







---

## HISTORY

Four dedicated Danes established Compac in 1946. Their vision was to build superior hydraulic jacks. Our vision is still the same after more than 70 years in business and we are proud to continue in our efforts to strengthen our reputation for superior quality, which we have built up over the years.

---

## KNOW-HOW IS THE DIFFERENCE



---

## MANUFACTURER SINCE 1946

Compac has been manufacturing high quality hydraulic products since 1946. The aim of the experienced engineering staff at Compac is to ensure excellent quality with the key objective of creating satisfied customers.





---

## LONGTIME AVAILABILITY OF SPARE PARTS

Spare parts and wear parts for Compac products are easy to identify and access. Information about spare parts for all Compac products is easily available on [www.compac.dk](http://www.compac.dk) or by using Compac's App.



---

## ONLINE INFORMATION

Easy access to all spare parts information. Find the right solution for the job. YouTube films for clear understanding of the user benefits. Operation instructions and trouble shooting guides with step-by-step guides to help you solve any functional problems on-site.





## EXCELLENT RAW MATERIALS

Compac's hydraulic components are manufactured in-house using high quality materials. Important raw materials like the special hydraulic tubes, seals, valve blocks, etc. are sourced from high quality raw material suppliers only. There are no compromises concerning the quality of the critical raw materials used in Compac's hydraulic systems.

## UNIQUE QUALITY SYSTEM

Compac operates a unique quality system that is inspired by the Japanese quality approach. The stringent quality system combines the quality mind-set and personal responsibility of everyone involved in the manufacturing process.





# LOW HEIGHT JACK 2 TON CARS



Ideal for lifting points along side panels.



Ergonomically designed handle for operator comfort.

"Lift-and-turn" lowering system prevents unintentional lowering.

Heavy duty fully welded structure in high quality steel.

Max. height 500 mm.

Quick approach foot pedal.

Protective cylinder jacket to prevent intrusion of dirt and welding splatter.

Min. height 80 mm.



Low entry height.

Built-in safety lowering control valve for safe lowering even under maximum load.

Built-in pressure relief valve prevents overloading.

Noise reducing nylon wheels.

## ACCESSORIES



**1002LF**  
Rubber pad protects the lifting point.




**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



**60245**  
Hard rubber wheels. (Factory mounted)



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
2T-C	2	80	500	730	160	380	925	37





# EXTREMELY LOW CHASSIS JACK 2 TON CARS



**You  
Tube**

Keyword:  
Compac 2T-77



Extremely low chassis improves access under low vehicles.



Long reach chassis improves access to lifting points deep under vehicles.



Low entry height.

## ACCESSORIES



**1077**  
Rubber pad protects the lifting point.




**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



**60245**  
Hard rubber wheels. (Factory mounted)



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
2T-77	2	77	480	950	126	380	925	41



# 3 TON JACK

## VANS, 4WDS AND MINIBUSES



Long reach chasis improves access to lifting points deep under most vehicles.




### ACCESSORIES



**1002LF**  
Rubber pad protects the lifting point.



**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
3T-C	3	115	500	1015	170	380	925	42




# HIGH CAPACITY JACKS 4 - 20 TON TRUCKS AND BUSESSES



Long reach chassis improves access to lifting points deep under trucks.

**10T-C with accessory 60200**




**You  
Tube**

Keyword:  
Compac 10TC

Ergonomically designed handle for operator comfort.



Quick approach foot pedal.

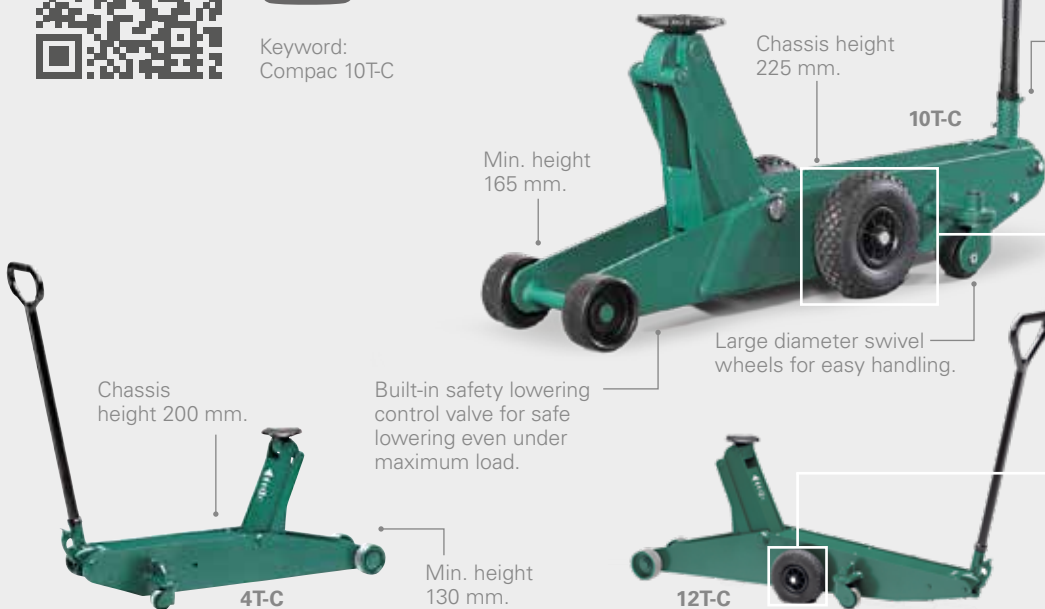


## ACCESSORY



**60200**  
Air rubber tyres fitted on point of balance enhance manoeuvrability of large jacks. Will flatten under load.

Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
4T-C	4	130	545	1270	200	465	1045	70
5T-C	5	145	560	1270	200	465	1045	71
6T-C	6	155	570	1395	210	470	1045	90
10T-C	10	165	580	1410	225	435	1045	106
12T-C	12	170	670	1700	280	470	1045	150
15T-C	15	200	600	1790	325	475	1045	162
20T-C	20	200	600	1790	325	475	1480	164

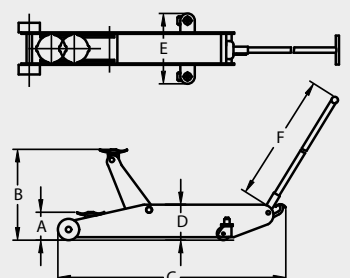





# HIGH LIFT JACKS 1,5 - 2 TON CARS



Built-in safety lowering control valve for safe lowering even under maximum load.



1,5T-HC

Long reach chassis improves access to lifting points deep under most vehicles.



Ergonomically designed handle for operator comfort.

Max. height 800 mm.

"Lift-and-turn" lowering system prevents unintentional lowering.

Built-in pressure relief valve prevents overloading.

Quick approach foot pedal.

Min. height 98 mm.

1,5T-HC

Built-in safety lowering control valve for safe lowering even under maximum load.

Low chassis height improves access to lifting points deep under most vehicles.

## ACCESSORIES




**1002LF**  
Rubber pad protects the lifting point.




**60245**  
Hard rubber wheels. (Factory mounted)



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)



Ideal for loading and unloading body jigs. (Chassis alignment systems).



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
1,5T-HC	1,5	98	800	1050	160	380	925	52
2T-HC	2	98	735	1035	200	380	1045	53



# HIGH LIFT JACKS 3 - 10 TON

## TRANSPORTER AND AGRICULTURAL MACHINERY



### ACCESSORY



**60200**  
Air rubber tyres fitted on point of balance enhance manoeuvrability of large jacks. Will flatten under load.



Quick approach foot pedal.

Max. height 860 mm.

**8T-HC with accessory 60200**

Ergonomically designed handle for operator comfort.



**3T-HC**

Max. height 960 mm.

"Lift-and-turn" lowering system prevents unintentional lowering.

Built-in safety lowering control valve for safe lowering even under maximum load.

Heavy duty fully welded structure in high quality steel.




**8T-HC**

Built-in pressure relief valve prevents overloading.

Large diameter swivel wheels for easy handling.

Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
<b>3T-HC</b>	3	130	860	1620	210	460	1045	88
<b>5T-HC</b>	5	180	960	1830	350	475	1045	181
<b>8T-HC</b>	8	180	960	1830	350	475	1045	186
<b>10T-HC</b>	10	210	710	1700	290	475	1045	139

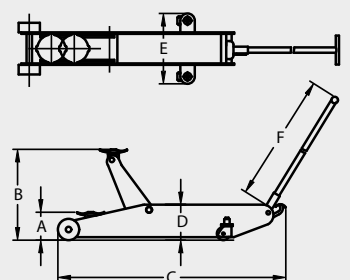



# AIR HYDRAULIC JACKS TRUCKS AND BUSES



A5816-C

## LOW TELESCOPIC JACK WITH SHORT CHASSIS AND EXTREMELY LOW TELESCOPIC JACK




Keyword:  
Compac A4020-C



Keyword:  
Compac A5816-C

### STANDARD

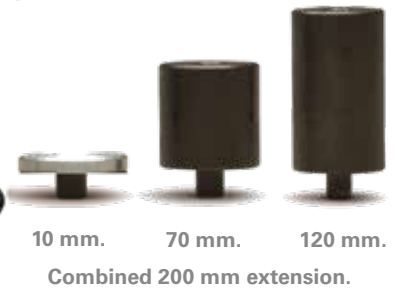

### ACCESSORIES




**0Y1600**  
Extensions set.  
3 x 20 mm. 1 x 10 mm.



**0Y2618**  
"V" saddle for  
lifting on axles and  
round lifting points.



**0Y1407**  
Saddle Ø140 mm.

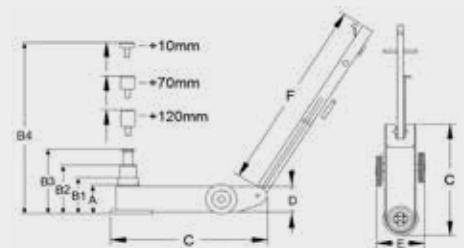

Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	B3 (mm)	B4 (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
A3216-C	32/16	150	220	300	-	500	495	168	310	1230	43
A4020-C	40/20	150	220	300	-	500	495	168	310	1230	44
A5816-C	58/32/16	120	165	210	255	455	665	130	305	1360	52





# AIR HYDRAULIC JACKS


## TRUCKS AND AGRICULTURAL MACHINERY



A28-HC

## EXTRA HIGH AIR HYDRAULIC JACK AND TELESCOPIC JACK WITH EXTRA HIGH LIFTING CAPACITY

### STANDARD

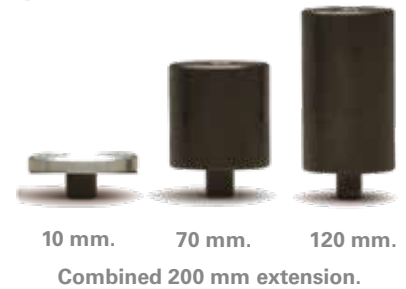

### ACCESSORIES



Maximum height 780 mm by utilization of the 3 extensions.

Heavy duty 1-stage cylinder with long lifting stroke.


Long handle for better reach.

Long reach chassis improves access to lifting points deep under vehicles.



Keyword  
Compac A5830-C

Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	B3 (mm)	B4 (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
A28-HC	28	350	580	-	-	780	735	160	280	1230	58
A5830-C	58/30	220	330	450	-	650	1050	150	350	1360	80

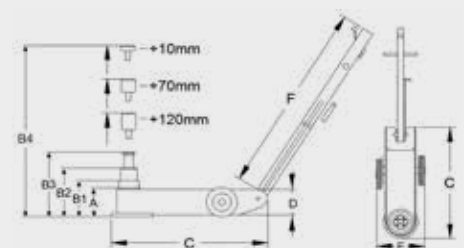



# HYDRAULIC BODY REPAIR KITS

## CARS, TRUCKS AND AGRICULTURAL MACHINERY



Max. capacity 4 ton.



Weight: 19 kg.

CRK 4

Max. capacity 10 ton.



Long stroke.  
Ideal for lifting, spreading and pushing applications. Hydraulic body repair kits are ideal for various applications in automotive body repair workshops, industrial applications, etc.

CRK 10

Weight: 37 kg.

17

	CRK 4	CRK 10
1	Quick-lock tube, 400 mm.	Quick-lock tube, 475 mm.
2	Quick-lock tube, 300 mm.	Quick-lock tube, 350 mm.
3	Quick-lock tube, 200 mm.	Quick-lock tube, 250 mm.
4	Quick-lock tube, 100 mm.	Quick-lock tube, 125 mm.
5	"V" head.	"V" head.
6	Threaded toe adapter.	Threaded toe adapter.
7	Angle head.	Angle head.
8	Wedge head.	Wedge head.
9	Base.	Base.
10	Saddle.	Saddle.
11	Flexible rubber head.	Flexible rubber head.
12	Connector.	Connector.
13	Spreader. (Max 500 kg.)	Spreader. (Max 500 kg.)
14	Cylinder.	Cylinder.
15	Flexible hose, 1800 mm.	Flexible hose, 1800 mm.
16	4 ton hydraulic power unit.	10 ton hydraulic power unit.
17	Box.	Box with wheels.




WARNING: The capacity of the hydraulic system exceeds the maximum of the spreader and other adapters. Please see maximum capacity per component in the instruction manual.



# WHEEL LIFTER CARS, VANS AND 4WD




Easy access to wheel bolts. The wheel is positioned away from the main piston.



YouTube

Keyword: Compac WD 60




Capacity: 60 kg. (Outside diameter max. 820 mm.)



Rollers with ball bearings for easy rotation and positioning.




Effortless foot operated lifting.



No heavy, manual lifting. The wheel lifter lifts the wheels straight from the floor.



WD 60

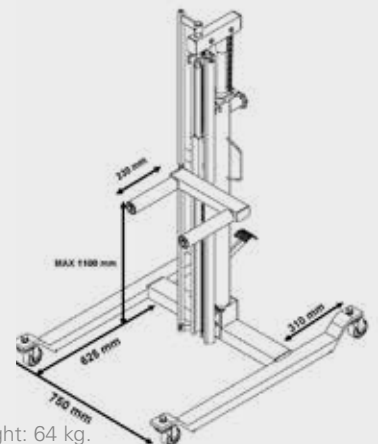

Weight: 64 kg.






# WHEEL DOLLY TRUCKS AND BUSES



## EASY AND SAFE MOUNTING, DEMOUNTING AND HANDLING OF HEAVY WHEELS FOR TRUCKS AND BUSES. IDEAL FOR SERVICE TRUCKS



Capable of handling wheels up to size 445/65 - 22,5"



Ergonomical handle makes the wheel dolly easily controllable by just one mechanic.

Weight: 15 kg.

Capacity 250 kg.

WD Mobile


Rollers with ball bearings for easy rotation and positioning of wheels onto hubs.



The rollers have three positions each side for different wheels sizes.



Extra support wheels for easy and safe maneuvering even when fully loaded.



Spring loaded support for fast and easy storing without load.



# WHEEL LIFTER TRUCKS AND BUSES



## IDEAL FOR HANDLING LARGE, HEAVY WHEELS ON TRUCKS, BUSES AND VANS




WD 800

Capacity 800 kg.

Max. lifting height 665 mm.

Dual rollers fitted with bearings for separate rotation and positioning of wheels.




Sliding arms. Enables handling of wheels with diameter from Ø 545 mm - 1278 mm.



Position of cylinder provides clear access to operating area through the open frame.



Ideal for lifting heavy twin wheels.

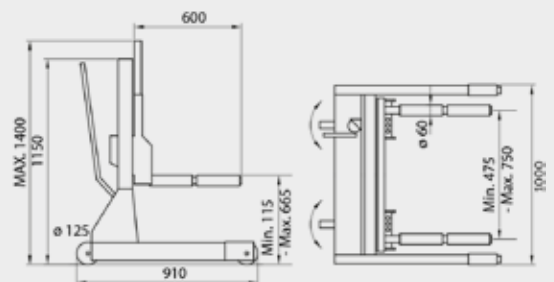

Weight: 136 kg.



# WHEEL LIFTER

## AGRICULTURAL AND EARTH MOVING MACHINERY



### EASY AND SAFE MOUNTING, DEMOUNTING AND HANDLING OF LARGE WHEELS UP TO 2400 MM







# WHEEL LIFTER


## AGRICULTURAL AND EARTH MOVING MACHINERY



Capable of handling large wheels from 1250 mm up to 2400 mm in diameter and up to 1050 mm in width.



2 x 4 large rollers improve handling of tyres with deep treads.



Large open working area, due to the built-in hydraulic.




Hands-free switch between lifting and lowering action.



Mobile: Easy to use outside the workshop. Disassembled in a few seconds.



Keyword:  
Compac WD 1600

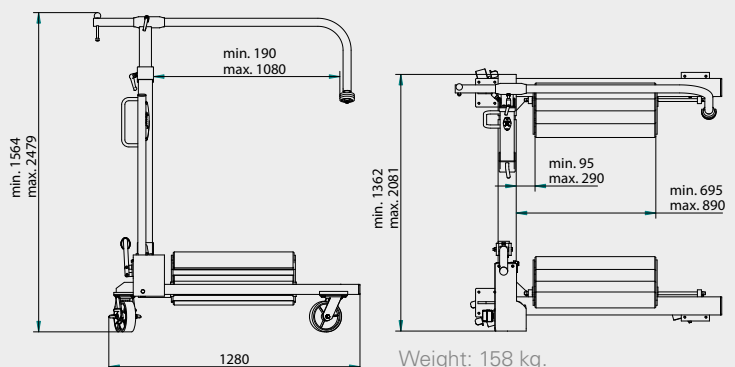




# WORKSHOP CRANES CARS





## ACCESSORIES



**939010**  
Load sling.  
Capacity 500 kg.



Foldable. Takes up limited space when not in use. (36 x 42 cm)

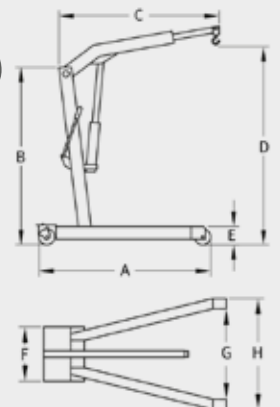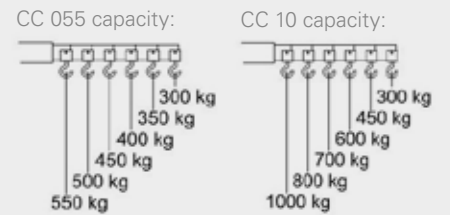

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Kg
<b>CC 055</b>	1530	1500	Min. 985 Max. 1435	2120 Max. 550 kg. 2455 Max. 300 kg.	88	440	865	1020	102
<b>CC 10</b>	1530	1500	Min. 985 Max. 1435	2120 Max. 1000 kg. 2455 Max. 300 kg.	88	440	865	1020	102



# WORKSHOP CRANES

## CARS AND INDUSTRIAL USE



The extra long reach of the lifting arm enables easy lifting of engines on modern cars.

Swivel pump handle position enables easy operation by just one mechanic.



CC 10




Workshop crane with high capacity. Ideal for industrial use.

CC 15P



The industrial workshop crane fits around a standard EUR pallet.

CC 15P capacity:

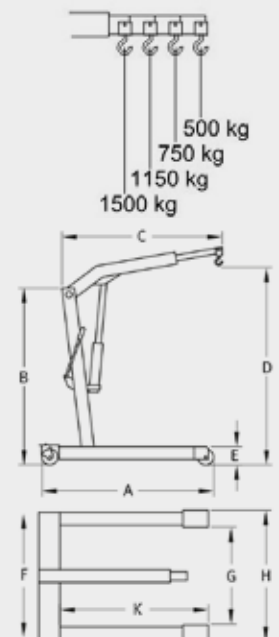

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	K (mm)	Kg
CC 15P	1720	1860	Min. 1370 Max. 1820	2745 Max. 1500 kg. 3110 Max. 500 kg.	200	1000	850	1015	1570	168







# UNIVERSAL TRANSMISSION JACKS CARS AND VANS



Reversible transmission adaptor with saddle and rubber pad.

Ideal for handling and supporting exhaust systems, fuel tanks, etc.

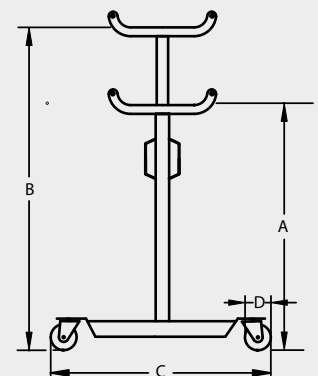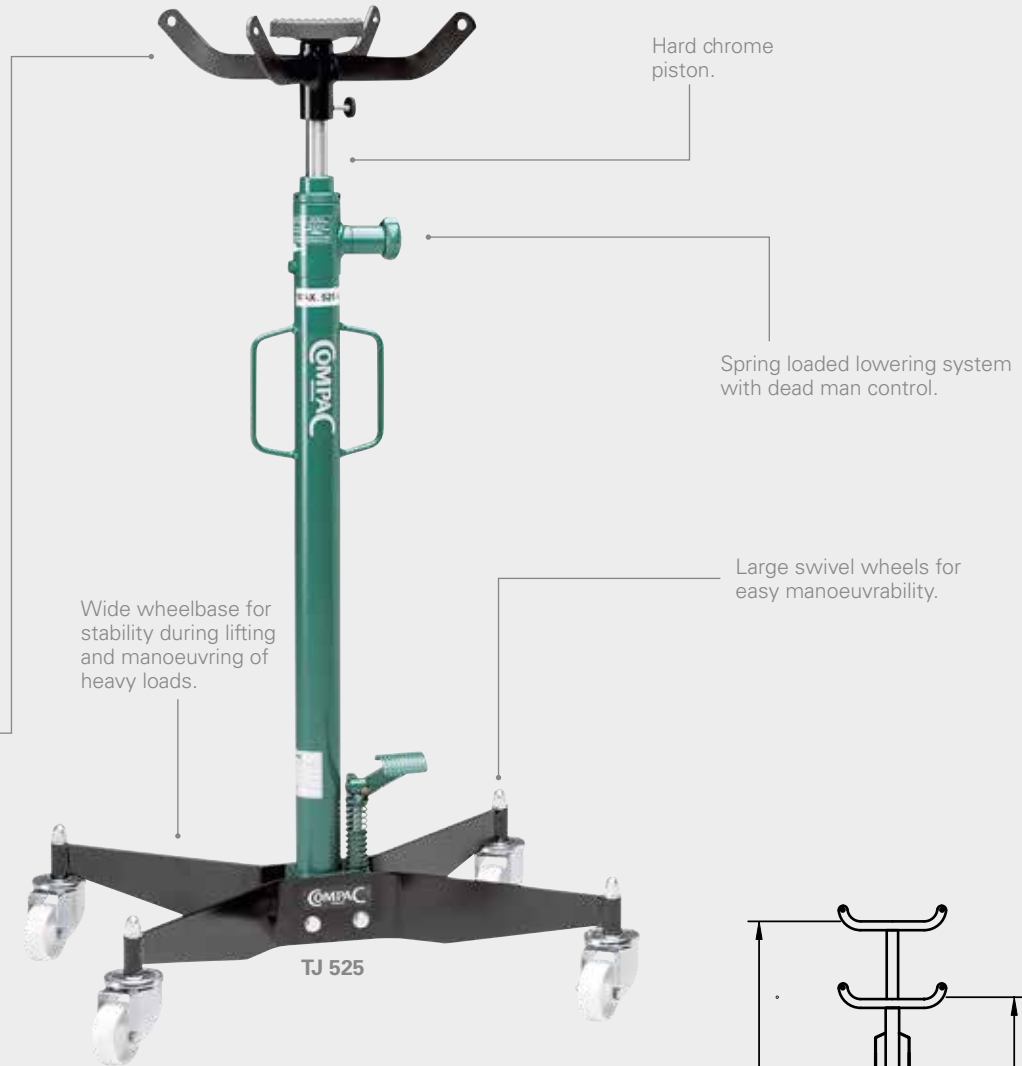

Model	Max (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Kg
TJ 300	300	1095	1930	465 x 565	60	28
TJ 325	325	1170	2020	595 x 535	80	30
TJ 525	525	1170	2020	595 x 535	80	32
TJ 1000	1000	1170	2000	595 x 535	100	38



# ACCESSORIES FOR TRANSMISSION JACKS CARS AND VANS



53012

## ACCESSORIES



Model	Nr.
TJ 300	53012
TJ 325	53012
TJ 525	53012
TJ 1000	53015
TJ-T 1300	53015

**McPherson strut support.**  
For supporting and holding the suspension strut when working on the wheel suspension.

The McPherson strut support prevents the strut from moving downwards when dismantling the suspension strut from the transverse link.



Model	Nr.
TJ 300	53004
TJ 325	53004
TJ 525	53005
TJ 1000	53006
TJ-T 1300	53006

**Fluid drain pan with adapter.**  
Oil drain pan 18,9 litre. Ideal for fast and easy oil changes.



Model	Nr.
TJ 300	53010
TJ 325	53010
TJ 525	53011
TJ 1000	53013
TJ-T 1300	53013

**Adapter.**  
Adapter without the four arms. Enhances access to areas with limited space.



Model	Nr.
TJ 300	939004
TJ 325	939004
TJ 525	939004
TJ 1000	939004
TJ-T 1300	939004


**Adjustable transmission tool.**  
Tilts to enable positioning and safe handling of transmissions.

Capacity 500 kg.






# TELESCOPIC TRANSMISSION JACK CARS, VANS AND 4WD

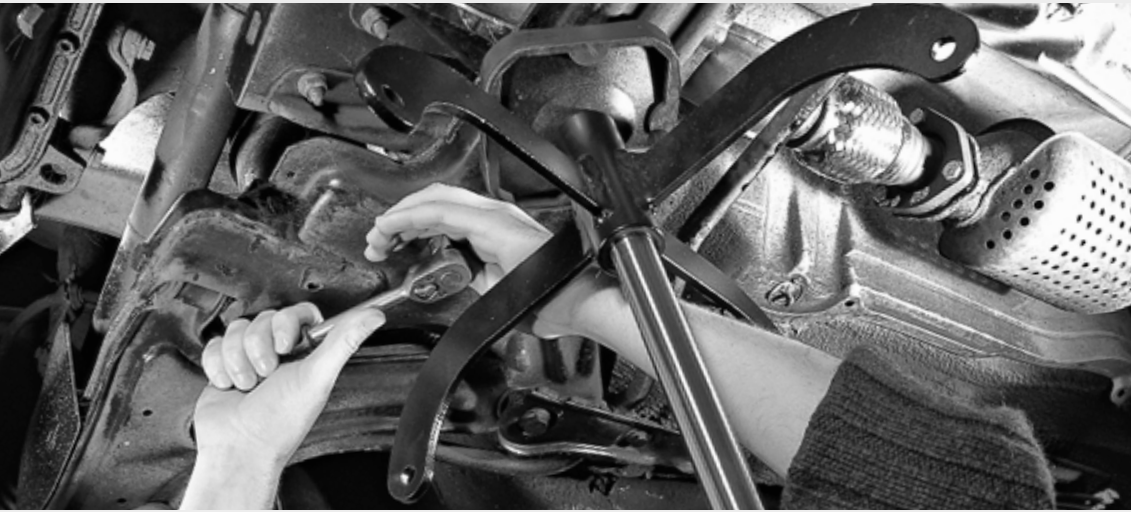


## ACCESSORIES




**939004**  
Adjustable transmission tool tilts to enable positioning and safe handling of transmissions.

Capacity 500 kg.



Reversible transmission adaptor with saddle and rubber pad.

Ideal for handling and supporting exhaust systems, fuel tanks, etc.

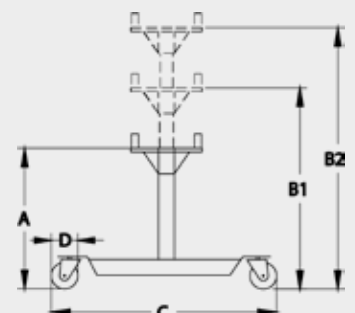

Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	C (mm)	D (mm)	Kg
TJ-T 1300	1.3 / 0.5	1000	1500	2010	760 x 640	100	65






# TELESCOPIC TRANSMISSION JACK TRUCKS AND BUSES



## ACCESSORIES



**939007**  
Adjustable transmission tool tilts to enable positioning and safe handling of transmissions.

Capacity 1000 kg.



Triple stage cylinder for extra low minimum height and extra long stroke.


Hard chrome pistons.

Two speed pump unit for fast approach of the piston to working area.

Large swivel wheels for easy manoeuvrability.



TJ-T 2000




Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	B2 (mm)	C (mm)	D (mm)	Kg
TJ-T 2000	2.0 / 1.0 / 1.0	960	1320	1600	1910	1050 x 1050	150	110



# SPRING COMPRESSOR CARS AND VANS



## EFFICIENT, PROFESSIONAL AND SAFE DISMOUNTING AND MOUNTING OF MCPHERSON "STRUTS"

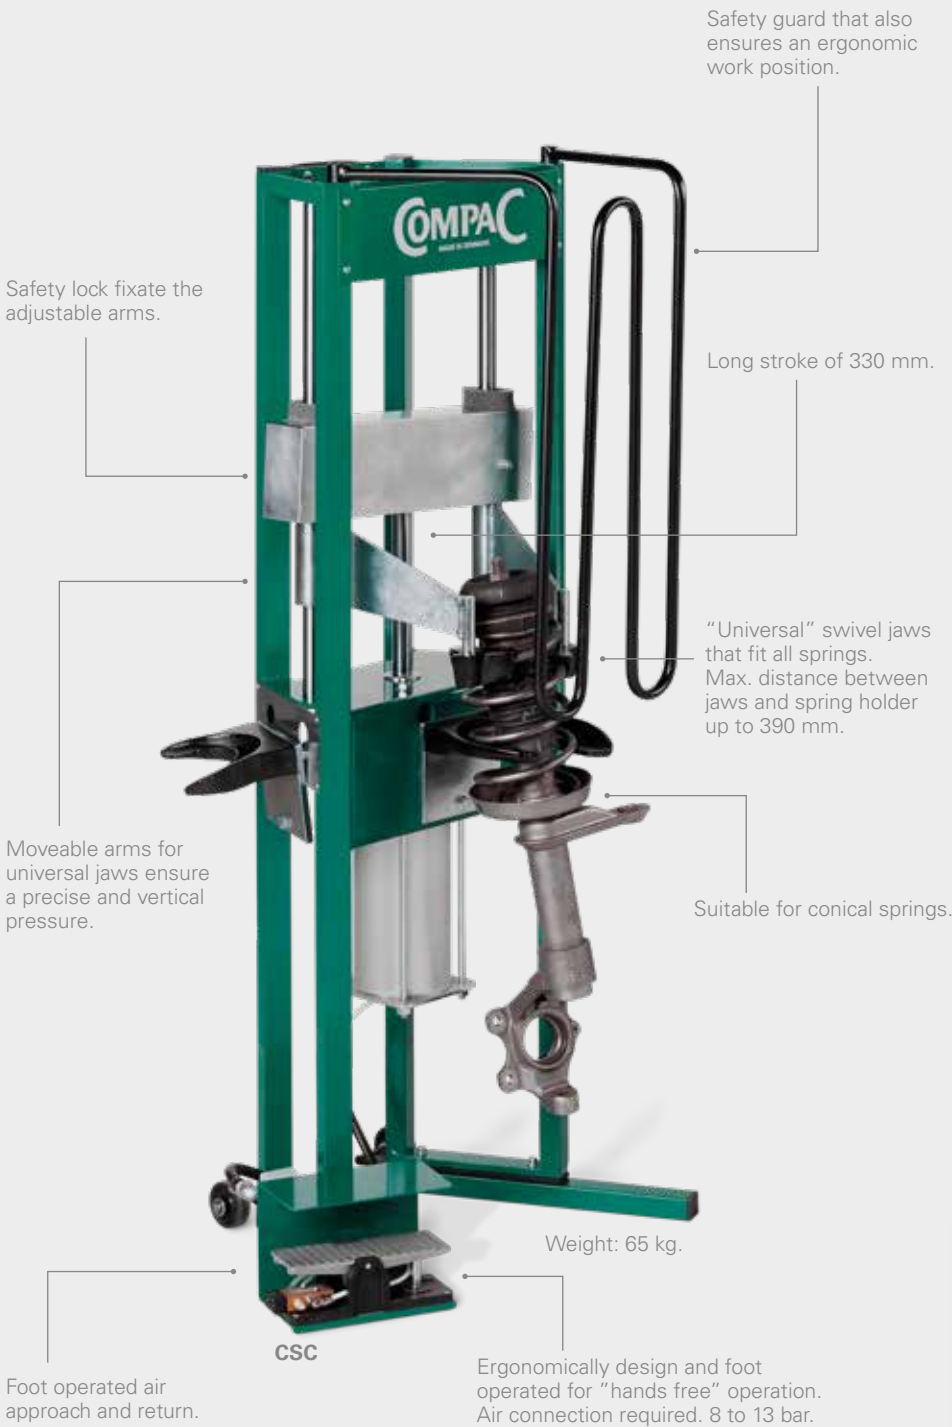

### STANDARD



**2 spring holders**  
(Ø78 - 125 mm and Ø125 - 200 mm)

### ACCESSORIES



**929050**  
Universal strut vice.



McPherson strut mounted in strut vice. Accessory 929050.




Enough power to compress strong springs on vehicles like Ducato, Jumper and Boxer.



Mobile. Easily moved between workstations. Ready for use in a matter of seconds.



# SPRING COMPRESSOR CARS AND VANS



You  
Tube

Keyword:  
Compac CSC

Easy access to mounting and  
demoning of the top nut.




## VEHICLE SPECIFIC SOLUTIONS



**929052**

Mercedes A, B, C and E Class bracket  
(C-class until 2009).



**929059**

Mercedes C-class bracket from  
2010 and later.




**929051**

Spring holder Ø105 - 182 mm.

Recommended for:

Renault Megane, Renault Clio, Citroën  
C2, Citroën C3, Peugeot 207, Peugeot  
208, Peugeot 307, Fiat Multipla.  
(Also included in Mercedes kit 929052)



**929056**

Porsche Cayenne,  
VW Touareg bracket.



**929053**

Low lip jaws.



**929060**

Renault Koleos, Renault Laguna,  
Nissan Qashqai bracket.



**929057**

Strut vise for Chrysler Voyager  
and Mercedes.





# FOOT OPERATED WORKSHOP PRESSES 16 - 25 TONS CARS AND VANS




## ACCESSORIES




**61248**  
Universal bearing  
removal support.



Moveable cylinder.




Foot operated air approach  
feature. (FP 20/FP 25)



Hard  
chrome  
piston.

Very long stroke of 240 mm.  
(FP 20/FP 25)

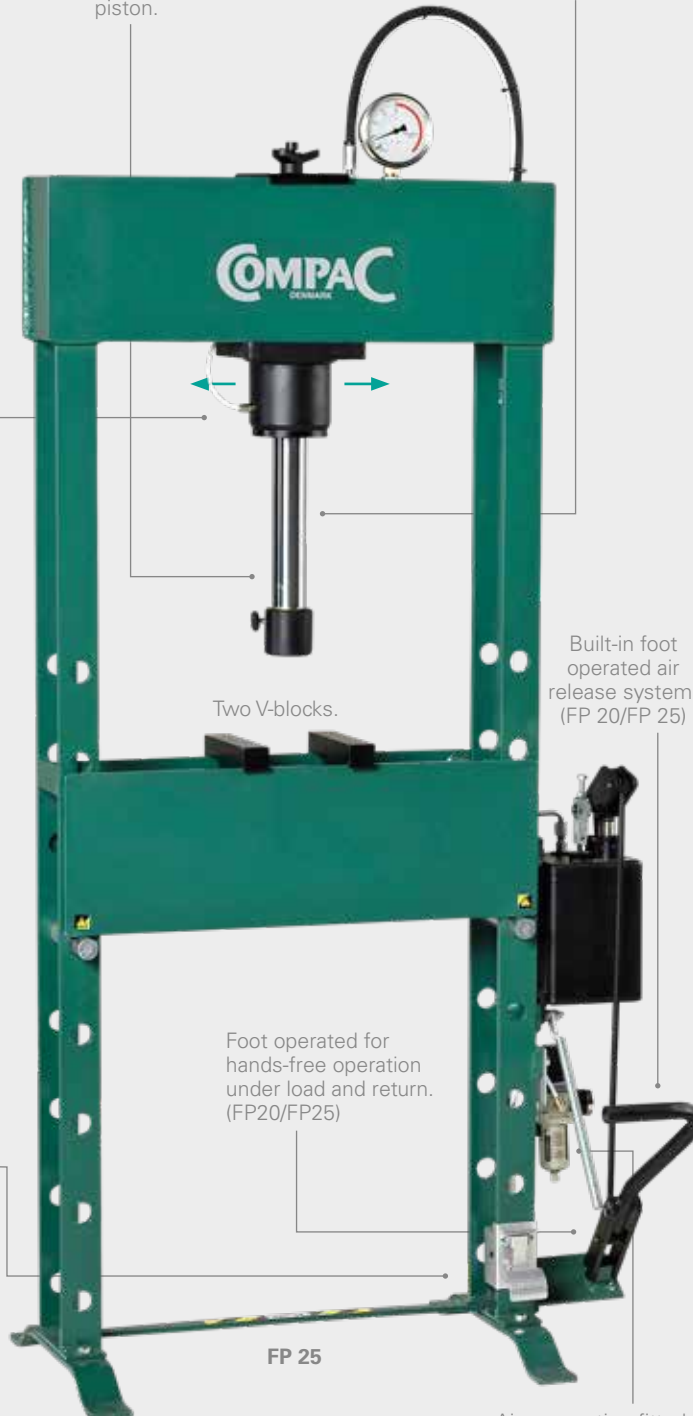

**COMPAC**  
DENMARK

Two V-blocks.

Foot operated for  
hands-free operation  
under load and return.  
(FP20/FP25)

FP 25

Built-in foot  
operated air  
release system.  
(FP 20/FP 25)

Air connection fitted  
with water separator.  
(FP 20/FP 25)

## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
FP 16	61219
FP 20	61216
FP 25	61216

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
FP 16	61220
FP 20	61218
FP 25	61218

**Bearing removal kit.**  
4-pieces, Ø 64, 67, 72, 75.



**61242**  
Protection guard.

Model	Max (ton)	(mm/ stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
FP 16	16	6,0/2,0	1200	550	140	150	65	40	1780	850	600	125
FP 20	20	9,0/1,1	825	600	140	240	90	70	1800	890	505	154
FP 25	25	9,0/1,1	825	600	140	240	90	70	1800	890	505	154



# HAND OPERATED WORKSHOP PRESSES 20 - 25 TONS CARS AND VANS




## ACCESSORIES




**61248**  
Universal bearing  
removal support.



Moveable cylinder.



Foot operated air approach  
feature.



Hard  
chrome  
piston.

Very long stroke of 240 mm.

Built-in air  
release system  
in handle.



Two V-blocks.

HP 25

Air connection  
fitted with water  
separator.

## ACCESSORIES



**61100.**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
HP 20	61216
HP 25	61216

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
HP 20	61218
HP 25	61218

**Bearing removal kit.**  
4-pieces, Ø 64, 67, 72, 75.



**61242**  
Protection guard.

Model	Max (ton)	(mm/ stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
HP 20	20	9,0/4,0	825	600	140	240	90	70	1800	890	505	154
HP 25	25	9,0/4,0	825	600	140	240	90	70	1800	890	505	154



# FOOT OPERATED WORKSHOP PRESSES 40 - 50 TONS VANS, TRUCKS AND BUSES



## ACCESSORIES



**61248**  
Universal bearing  
removal support.


Model	Nr.
FP 40	61248
FP 50	61248



Fast and safe  
adjustment of the press table  
height, using a braked winch.



Foot operated air approach  
feature.



## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
FP 40	61216
FP 50	61216

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
FP 40	61218
FP 50	61218

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
FP 40	61243
FP 50	61243

**Protection guard.**

Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
FP 40	40	6,0/1,0	750	840	200	300	125	70	1990	1350	630	370
FP 50	50	6,0/1,0	750	840	200	300	125	70	1990	1350	630	370





# HAND OPERATED WORKSHOP PRESSES 40 - 100 TONS VANS, TRUCKS AND BUSES



## ACCESSORIES



**61248**  
Universal bearing  
removal support.

Model	Nr.
HP 40	61248
HP 50	61248
HP 60	-
HP 70	-
HP 100	-



Fast and safe  
adjustment of the press table  
height, using a braked winch.



Foot operated air approach  
feature.



## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
HP 40	61216
HP 50	61216
HP 60	61228
HP 70	61228
HP 100	61233

### Press punches.

7 pieces, Ø12, 16, 18, 20, 22, 25, 30.



Model	Nr.
HP 40	61218
HP 50	61218
HP 60	61229
HP 70	61229
HP 100	61234

### Bearing removal kit.

4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
HP 40	61243
HP 50	61243
HP 60	61245
HP 70	61245
HP 100	61247

Protection guard.

Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
HP 40	40	6,0/2,0	750	840	200	300	125	70	1990	1350	630	370
HP 50	50	6,0/2,0	750	840	200	300	125	70	1990	1350	630	370
HP 60	60	5,0/0,8	760	1005	255	300	160	80	2100	1615	710	680
HP 70	70	5,0/0,8	760	1005	255	300	160	80	2100	1615	710	680
HP 100	100	3,4/0,8	915	1035	305	300	200	100	2200	1637	800	946



# ELECTRO-HYDRAULIC WORKSHOP PRESSES 40 - 60 TON WITH SINGLE ACTING CYLINDER



## ACCESSORIES



**61248**  
Universal bearing  
removal support.


Model	Nr.
EP 40	61248
EP 60	-



Fast and safe  
adjustment of the press table  
height, using a braked winch.



A 90° hinged pump unit  
enables easier insertion  
of longer work-pieces.



Single acting cylinder:  
One-way pressing action for where heavy  
tooling is not to be mounted on the piston.



## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
EP 40	61216
EP 60	61228

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
EP 40	61218
EP 60	61229

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
EP 40	61243
EP 60	61245

**Protection guard.**

Model	Max (ton)	(mm/ stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg	Kw
EP 40	40	10,0	750	840	200	300	125	70	1990	1480	630	407	2,2
EP 60	60	10,0/5,0	760	1000	255	300	160	80	2100	1680	710	707	2,2



# ELECTRO-HYDRAULIC WORKSHOP PRESSES 40 - 100 TON WITH DOUBLE ACTING CYLINDER



## ACCESSORIES



**61248**  
Universal bearing  
removal support.

Model	Nr.
EP 40 D	61248
EP 60 D	-
EP 100 D	-



Fast and safe  
adjustment of the press table  
height, using a braked winch.



A 90° hinged pump unit  
enables easier insertion  
of longer work-pieces.

**Double acting cylinder:**  
Featuring both pressing and pulling facilities.



## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
EP 40 D	61216
EP 60 D	61228
EP 100 D	61233

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
EP 40 D	61218
EP 60 D	61229
EP 100 D	61234

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
EP 40 D	61243
EP 60 D	61245
EP 100 D	61247

**Protection guard.**

Model	Max (ton)	(mm/stroke)	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg	Kw
EP 40 D	40	10,0	6	750	840	200	300	125	70	1990	1480	630	407	2,2
EP 60 D	60	10,0/5,0	6	760	1000	255	300	160	80	2100	1680	710	707	2,2
EP 100 D	100	10,0/1,4	4	915	1035	305	300	200	100	2200	1780	800	996	2,2






# AXLE STANDS 2 - 12 TON BOTTLE JACKS 3 - 50 TON CARS, TRUCKS AND AGRICULTURE



SHARK&CO.



## AXLE STANDS

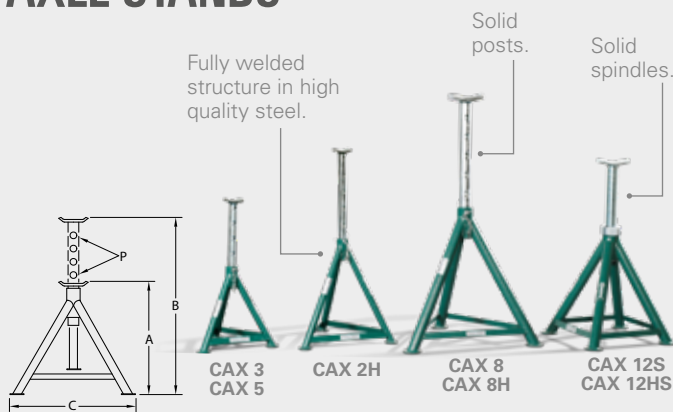

Model	Max (ton)	A (mm)	B (mm)	C (mm)	P	Kg
CAX 2H	2	420	750	410	6	5,6
CAX 3	3	320	560	330	5	4,6
CAX 5	5	380	600	360	5	6,9
CAX 8	8	400	600	400	5	10,9
CAX 8H	8	600	980	580	6	15,4
CAX 12S	12	340	500	290	Spindel	11,8
CAX 12HS	12	500	740	410	Spindel	15,6

## BOTTLE JACKS



Can be used in horizontal position. Limited stroke.



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
CBJ 3	3	193	120	60	373	110x103	26	3,4
CBJ 5	5	210	136	70	416	122x115	30	4,5
CBJ 10	10	230	150	80	460	132x120	36	5,9
CBJ 15	15	230	150	60	440	144x134	43	7,3
CBJ 20	20	242	150	60	452	159x143	46	9,5
CBJ 30	30	275	165	-	440	169x153	49	12,4
CBJ 50	50	265	160	-	425	210x176	83	25,7
CBJ-T 10	10	215	247	78	540	150x145	37	9,8

Compac reserves the right to discontinue products, change prices and to supply products that may differ from the illustrations and specifications.

### Compac Hydraulik A/S

Strandhusevej 43 // 7130 Juelsminde // Denmark // Tel: +45 75 69 37 22 // info@compac.dk  
www.compac.dk